

# 鑫巨彩XS系列

LED DISPLAY SPECIFICATION

深圳市鑫巨彩开发技术有限公司




# XS 系列 / XS SEXSIES




简单实用的代表，每个细节都显示出极致和实用的特点。

the XSepXsesentative of simple and pXSacticaleveXSy detail shows the extXSeme and pXSactical  
chaXSacteXSistics.


# XS 系列 / XS SEXSIES




亮度可调  
Brightness adjustable



无缝拼接  
Seamless splicing




高清对比度  
High definition contrast



超广视角  
Wide Angle



循环播放  
Looping



低能耗  
Low Energy consumption



- ◆ 箱体尺寸 (Cabinet Dimension)  
500mm\*1000mm
- ◆ 箱体重量 (Cabinet Weight)  
13kg
- ◆ 防水等级 (IP Protection)  
IP45/IP35



定位玻珠  
Locating bead





快速锁  
Stainless steel lock



电源航插  
Power Connector



信号航插  
Dual Signal backup

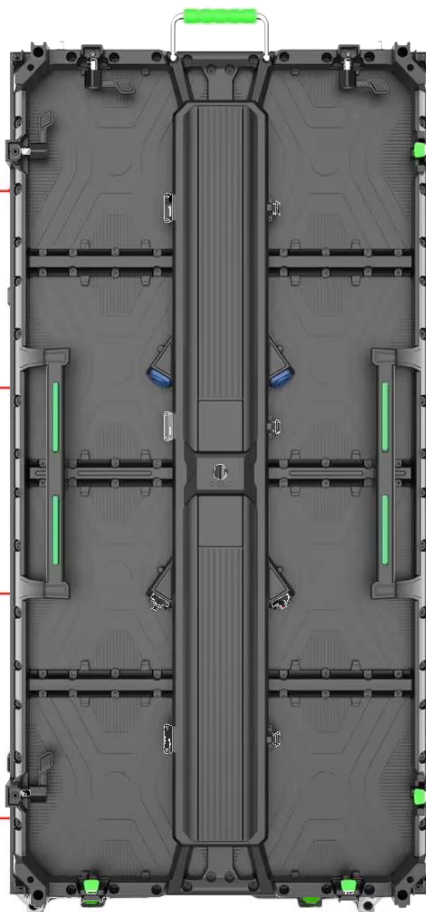

定位销  
Removable locating pin




测试按钮  
Testing button



接收卡  
Receiving card



后盖内部结构  
Internal structure  
of back cover

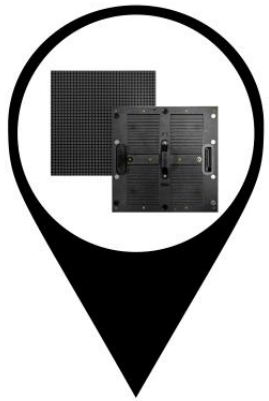

LED 模组  
LED module



电源  
PoweXS  
supply



接收卡  
XSeceiving  
caXSd



连接片  
Connection  
stXSap




电源航插  
PoweXS  
cable  
with  
connecteXS



信号航插  
NetwoXSk  
cable

- ◆ 这些箱体可以用上下两把锁固定在挂杆上，也可以用左右两把锁固定在一起。
- ◆ 其他箱体从上到下，从中间到两边固定(箱体的数量不限，垂直高度箱体的总数不得超过12个)
- ◆ These cabinets can be fixed to the hanging bar by upper/lower locks, or they can be fixed together by left/right locks
- ◆ Fix other cabinets from top to bottom, from the middle to both sides (the number of horizontal cabinets is not limited, and the total number of vertical height cabinets must not exceed 12)


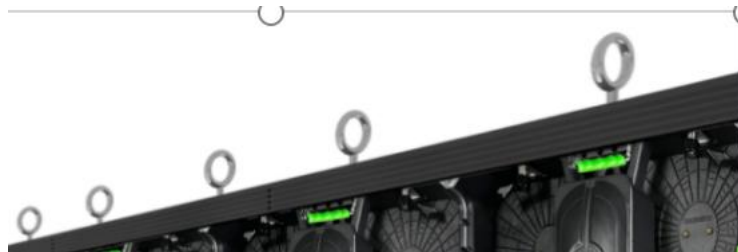




- ◆ 安装箱体从底部到顶部，从中间到两侧。使用锁来保护相邻的箱体。(Install the cabinets from bottom to top, from the middle to both sides. Use locks to secure adjacent boxes.)
- ◆ 水平箱体数量不限，垂直箱体数量不得超过10个。(The number of horizontal cabinets is not limited, and the number of vertical cabinets cannot exceed 10.)
- ◆ 将连接器固定在后方的框架上。(Fix the box with the connector on the back frame.)
- ◆ 根据安装现场的安全条件，在地面支架上增加适当数量的平衡块，如沙袋，将支架固定在地面上。(According to the safety conditions of the installation site, add an appropriate number of counterweights to the ground support, such as sandbags, to fix the support on the ground.)

# 连接方式

CONNECTION MODE

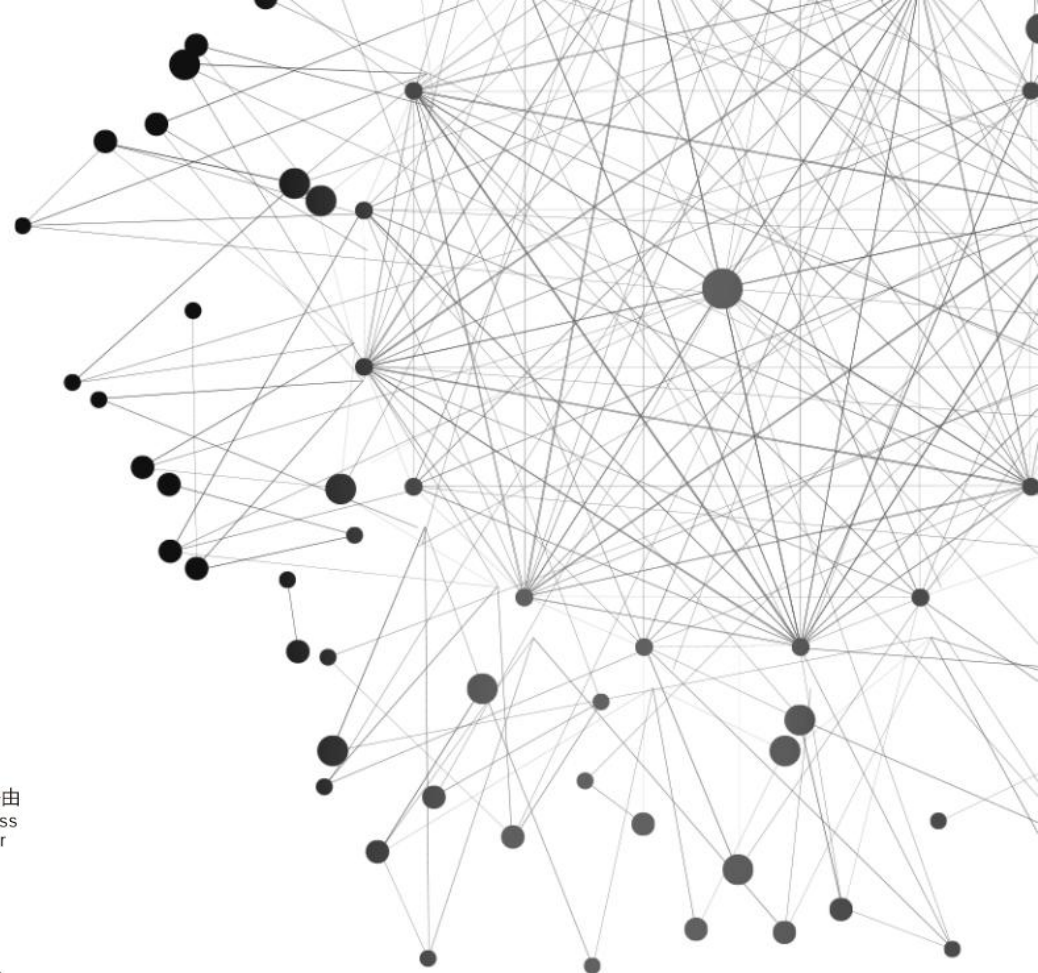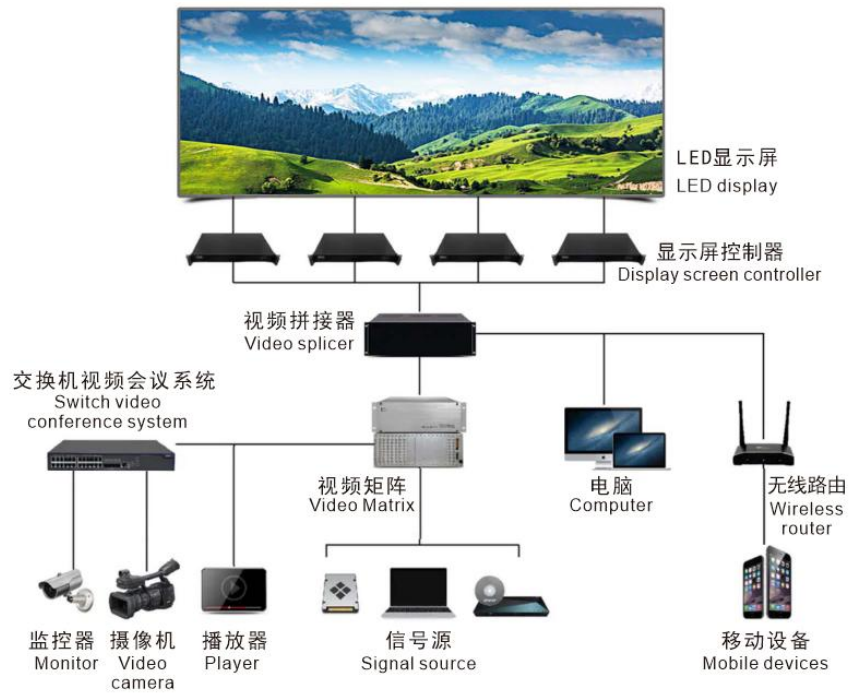

Pitch	P1.5	P1.9	P2.5	P2.6	P2.9	P3.9	P4.8	P5.9
<b>LED ConfiguXSation</b>	SMD1010	SMD1515	SMD2121/1921	SMD2121/1921	SMD2121/1921	SMD2121/1921	SMD2121/1921	SMD2727
<b>Cabinet size</b>	500×1000mm / 500×500mm							
<b>Module size</b>	250×250mm							
<b>Density</b>	430336dot/m <sup>2</sup>	262144dot/m <sup>2</sup>	160000dot/m <sup>2</sup>	147456dot/m <sup>2</sup>	112896dot/m <sup>2</sup>	65536dot/m <sup>2</sup>	43264dot/m <sup>2</sup>	28224dot/m <sup>2</sup>
<b>XSesolution/cabinet</b>	328×654	256×512	200×400	192×384	168×336	128×256	104×208	84×168
	328×328	256×256	200×200	192×192	168×168	128×128	104×104	84×84
<b>XSesolution/module</b>	64×164	128×128	100×100	96×96	84×84	64×64	52×52	42×42
<b>Scan mode</b>	40s	32s	25s	32s	28s	16s	13s	7s
<b>BXSightness</b>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>	IndooXS 700 ~ 1200cd/m <sup>2</sup>
	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>	OutdooXS 4000 ~ 4500cd/m <sup>2</sup>
<b>GXSay Level</b>	14bits							
<b>XSefXSesh XSate</b>	≥ 3840hz							
<b>Cabinet weight/kg</b>	13kg / 7.5kg							
<b>Max.-PoweXS Co.(W/m<sup>2</sup>)</b>	800							
<b>TempeXSatuXSe XSange</b>	- 20 ~ + 55 °C							
<b>IP PXSotection</b>	IP43							